




A step 2 component of the Henry® 1-2-3 Moisture Control System™



Henry® Moistop neXT® Flashing

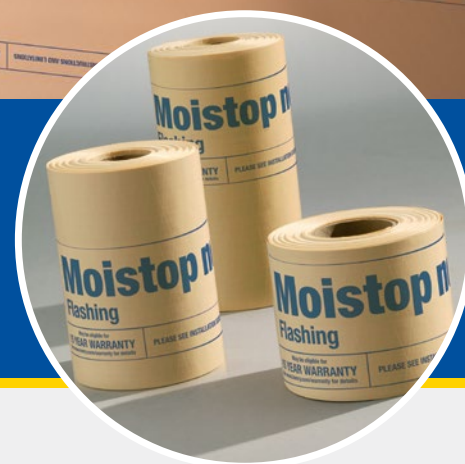

Superior protection against extreme elements

Henry® Moistop neXT® is an ultra-high performance, mechanically attached flashing solution designed to protect against wind-driven moisture and water intrusion on the jobsite and in finished construction. It can be used on all types of windows and doors, including wood, vinyl and aluminum casing doors.

Comprised of two layers of polyolefin film laminated together with a durable core of fiberglass scrim reinforcement, **Moistop neXT** is proven to withstand 100 MPH wind-driven rain conditions – resisting the shear forces that cause rips and tears.

As part of the Henry® 1-2-3 moisture control system, **Moistop neXT** is designed to withstand the rigors of the job site and the elements, and is backed by an industry leading 15-year material PLUS labor warranty.

Features and benefits



Ultra-high performance water barrier engineered to withstand extreme wind-driven weather conditions



Polyolefin film with durable core of fiberglass scrim reinforcement provides high resistance to rips and tears



Complies with ASTM D779, providing water resistance for up to 150 hours

Performance standards you can trust

Moistop neXT Flashing is tested in accordance with ASTM International procedures. It is a premium, mechanically-attached, membrane designed to prevent incidental moisture intrusion around windows and doors.

Physical/performance property	Typical value	Test method
Water vapor permeance	0.49 perms	ASTM E96 (B)
Water resistance	150 hours	ASTM D779
Tensile strength	MD - 35 lb./inch CD - 27 lb./inch	ASTM D882
Tear strength	MD - 3200+ grams CD - 3200+ grams	ASTM D1922
Mold growth	0 Fungal Growth	ASTM G21

*Moistop neXT is tested in accordance with ASTM International procedures. The values shown are typical values obtained in these tests.

Product characteristics

Composition	Two layers of water resistant polyolefin film laminated together with a tough internal fiberglass reinforcement. Thickness is 15 mils.
Roll size	6", 9" and 12" x 200'
Weight (lbs. per roll)	6 (6") 9 (9") 12 (12")

Product approvals, certifications and specifications

ASTM International D779 - Standard Test Method for Water Resistance of Paper, Paperboard, and Other Sheet Materials by the Dry Indicator Method
ASTM International D882 - Standard Test Method for Tensile Properties of Thin Plastic Sheeting
ASTM International D1922 - Standard Test Method for Propagation Tear Resistance of Plastic Film and Thin Sheeting by Pendulum Method
ASTM International E96 - Water Vapor Transmission of Materials
ASTM International G21 - Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi
AAMA 712 - Voluntary Specification for Mechanically Attached Flexible Flashing

Limitations: Moistop neXT should not be installed horizontally or at a slope of less than 60°. Product should be covered as soon as possible. Inspect product to insure it is free of any protrusions or damage that may compromise its moisture-resistive properties.

Installation: In a typical window installation, Moistop neXT Flashing is first applied at the sill and jambs of the window openings using exterior grade fasteners. Moistop® Sealant is applied to the window flanges and windows are installed. Sealant is then applied continuously along the face of window head mounting flange, and Moistop neXT Flashing is embedded in the sealant along the head of the window opening.

Availability: Henry products are distributed nationwide. For product information and pricing, please call a Henry distributor near you. If you need assistance locating a participating distributor, please call our Customer Service Department at 1-800-773-4777.

Henry Product Warranty Information: This product may be eligible for the 15-year Henry 1-2-3 Moisture Control System Warranty when used in conjunction with other products. See <https://us.henry.com/warranty> for details.

We, the manufacturer, warrant only that this product is free of defects, since many factors which affect the results obtained from this product – such as weather, workmanship, equipment utilized, and prior condition of the substrate – are all beyond our control. We will replace at no charge any product proved to have a material defect within 12-months of purchase, provided it has been applied in accordance with our written directions for uses we recommend as suitable for this product. Proof of purchase must be provided.

DISCLAIMER OF WARRANTIES AND LIMITATION OF LIABILITY: THIS LIMITED WARRANTY IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. NO ONE, INCLUDING THE MANUFACTURER, SHALL HAVE ANY LIABILITY OF ANY KIND BEYOND PRODUCT REPLACEMENT, INCLUDING FOR NEGLIGENCE OR FOR DIRECT, CONSEQUENTIAL, EXEMPLARY OR INCIDENTAL DAMAGES, RESULTING FROM ANY MISUSE, DEFECTS OR DELAYS CAUSED BY REPLACEMENT OR OTHERWISE. IF PURCHASER DOES NOT ACCEPT THESE TERMS, PURCHASER MAY RETURN WITHIN 30-DAYS OF PURCHASE ALL UNOPENED CONTAINERS OR PACKAGES OF PRODUCT PURCHASED FOR A FULL REFUND. RETENTION OF PRODUCT BEYOND 30-DAYS, OR USE OF PRODUCT SHALL CONSTITUTE ACCEPTANCE OF THESE TERMS, CONDITIONS, AND DISCLAIMERS. THIS LIMITED WARRANTY AND LIABILITY DISCLAIMER PROVIDES THE PURCHASER'S EXCLUSIVE REMEDY FOR ANYTHING RELATING TO THE PRODUCT.

To the extent that any part of this LIMITED PRODUCT WARRANTY AND LIABILITY DISCLAIMER is determined unenforceable under the law of the place of purchase of the product, that part is severed and the remainder of these terms remain in full force and effect. To the extent permitted by law, the duration of any implied warranties is limited to the duration of Henry's express warranty.

This warranty language supersedes any language found elsewhere, including product labels, sell sheets and/or technical documents.



Featuring a range of compatible weather barriers, flashings and sealants, the Henry® 1-2-3 Moisture Control System makes it easier than ever to build with confidence.

Henry, Moistop, Moistop neXT, and Building Envelope Systems are registered trademarks of the Henry Company

Henry®

Building Envelope Systems®
Wall & Window | Roof | Foundation

Ask us today about other Henry® solutions that help manage the flow of water, air, vapor and energy.