


Using the Moistop Ultra® family of products in a concrete capped Crawl Space

This illustration shows a typical installation condition. Please consult your design professional and Fortifiber's installation guide at www.Fortifiber.com for complete installation details.

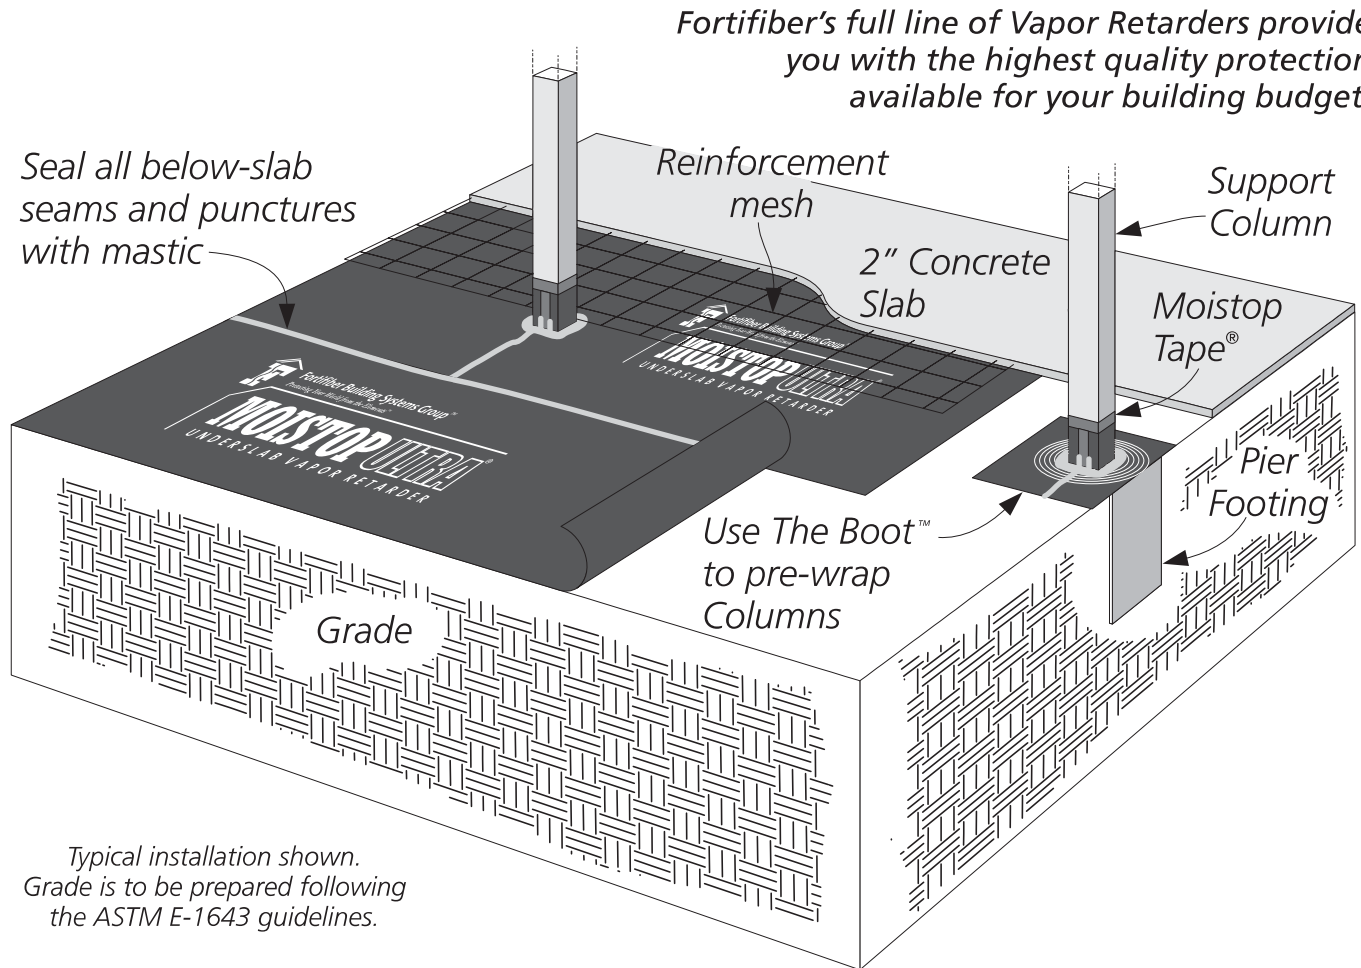

Typical installation shown. Grade is to be prepared following the ASTM E-1643 guidelines.

Fortifiber Building Systems Group®
Protecting Your World from the Elements®

MOISTOP ULTRA 15
UNDERSLAB VAPOR RETARDER

- 1,956 sq. ft. rolls (144" x 163'), center-folded
- 15 mil thickness
- Exceeds ASTM E-1745 Class "A", "B", and "C" Standards

Fortifiber Building Systems Group®
Protecting Your World from the Elements®

MOISTOP ULTRA 10
UNDERSLAB VAPOR RETARDER

- 2,940 sq. ft. rolls (168" x 210'), center-folded
- 10 mil thickness
- Exceeds ASTM E-1745 Class "A", "B", and "C" Standards

Fortifiber Building Systems Group®
Protecting Your World from the Elements®

MOISTOP ULTRA 6
UNDERSLAB VAPOR RETARDER

- 1,995 sq. ft. rolls (180" x 133'), center-folded
- 6 mil thickness
- Exceeds ASTM E-1745 Class "B" and "C" Standards

Call 1 800 773 4777 for Technical Assistance



Fortifiber Building Systems Group®

Protecting Your World from the Elements®