


**BLUESKIN PRESEAL TAPE 120V**  
(EXTEND 1" (25MM) MINIMUM  
BEYOND WATERPROOFING  
TERMINATION SEALANT)

SET PRE-APPLIED  
WATERPROOFING  
INTO WET HENRY  
**925 BES SEALANT**  
AND TERMINATE WITH  
**HENRY 925 BES SEALANT**




COLUMN

**HENRY 925 BES SEALANT**  
(EXTEND 1" (25MM) ONTO REBAR)

**BLUESKIN PRESEAL TAPE 120V**  
(EXTEND 1" MINIMUM BEYOND  
WATERPROOFING TERMINATION  
SEALANT)

**BLUESKIN PRESEAL 435**  
(COMPACTED EARTH  
APPLICATIONS MUST USE  
**BLUESKIN PRESEAL 435** - SEE  
COMPACTED EARTH DETAIL  
FOR COMPACTED EARTH  
APPLICATIONS)

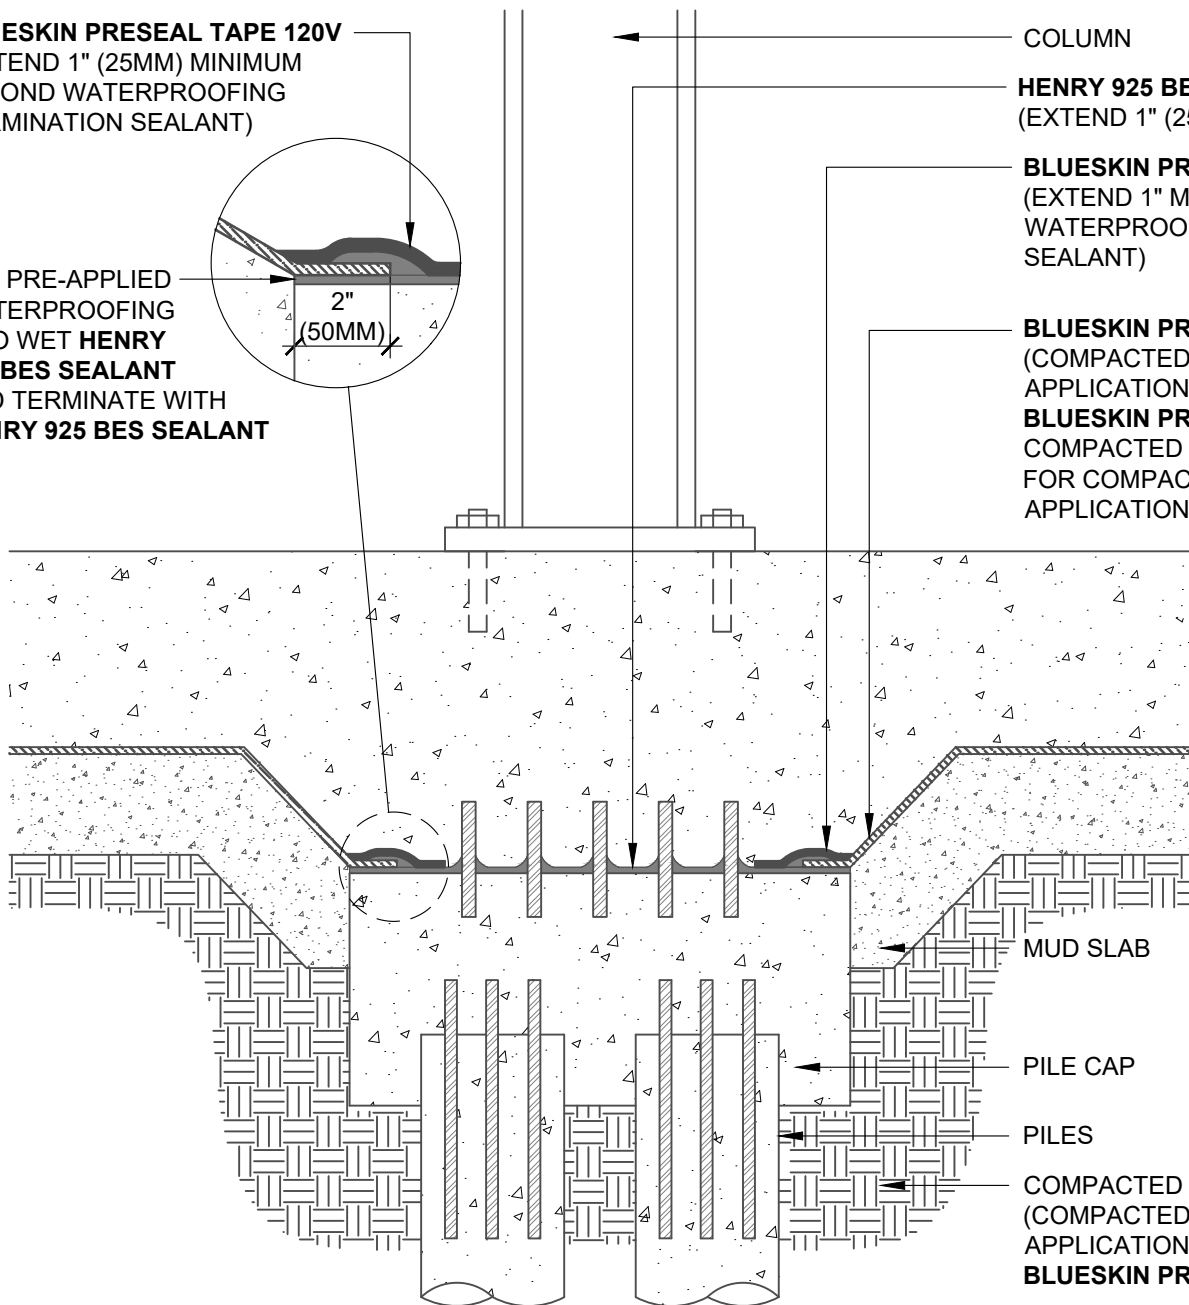

**NOTES:**

1. DETAIL SHOWS HENRY PRE-APPLIED WATERPROOFING SYSTEM FOR APPLICATIONS USING HENRY **BLUESKIN PRESEAL 435**. SUBSTRATE SHOWN IS FOR REFERENCE ONLY.
2. SEE DETAIL BSPS-4A5B WHERE PRE-APPLIED WATERPROOFING IS INSTALLED OVER COMPACTED EARTH.
3. REFER TO PRODUCT SPECIFIC TECHNICAL DATA SHEET (TDS) AND GUIDE SPECIFICATION FOR INSTALLATION PROCEDURES.

MANUFACTURER GUIDE DETAILS ARE FOR REFERENCE ONLY. HENRY DOES NOT ASSUME RESPONSIBILITY FOR ERRORS OR DEVIATIONS IN DESIGN OR ENGINEERING. PROJECT SPECIFIC VERIFICATION IS RECOMMENDED PRIOR TO INSTALLATION.

**HENRY PRE-APPLIED WATERPROOFING SYSTEM**

**PILE CAP**

**BLUESKIN PRESEAL 320 OR BLUESKIN PRESEAL 435**  
**MUD SLAB - HYDROSTATIC**

SCALE: N.T.S.

09-14-2022

**BSPS-4A5B**

