

NEOFLASH OR HENRY 990-25
 SET IN **HENRY 790-11** (125 MILS)
 (METAL FLASHING AT EXPANSION
 JOINT NOT SHOWN FOR CLARITY)

BACKER ROD

PAVER SYSTEM OR
 GRAVEL BALLAST

OPTIONAL MOISTURE
 RETENTION FABRIC

WATER RETENTION
 AND DRAINAGE
 COMPOSITE

INSULATION

OPTIONAL
 DRAINAGE
 COMPOSITE


ROOT BARRIER

MODIFIEDPLUS G100S/S

HENRY 790-11/790-11EV
 2-PLY 215 MIL REINFORCED
 WITH **POLYESTER FABRIC**

HENRY 910 ASPHALT PRIMER
 OR **HENRY 930 POLYMER**
MODIFIED ADHESIVE

NEOFLASH OR HENRY 990-25
 SET IN **HENRY 790-11** (125 MILS)

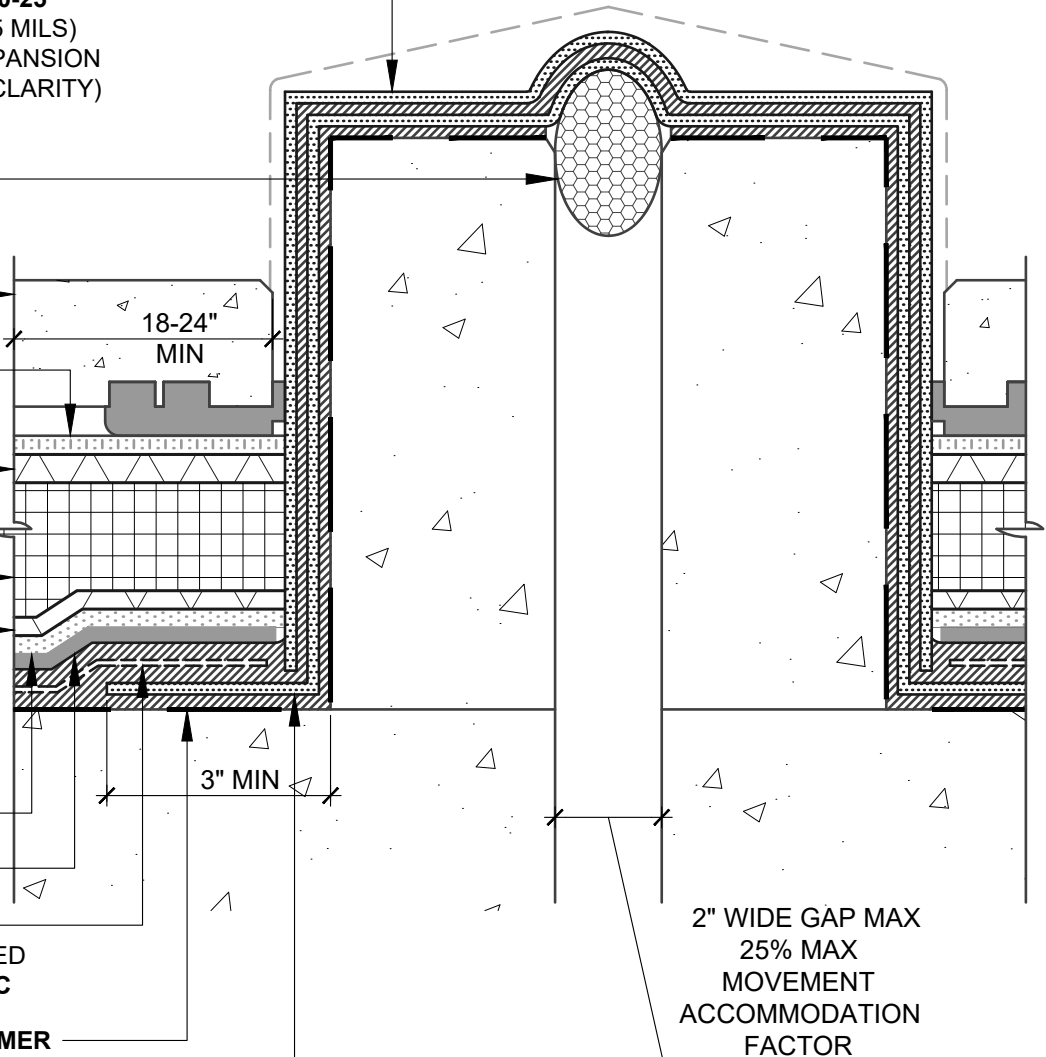

2" WIDE GAP MAX
 25% MAX
 MOVEMENT
 ACCOMMODATION
 FACTOR

NOTES:

1. DETAIL SHOWS HENRY VEGETATIVE ROOFING WITH **HENRY 790-11/790-11EV** WATERPROOFING/ROOFING ASSEMBLY. SUBSTRATE SHOWN IS FOR REFERENCE ONLY. REFER TO PRODUCT SPECIFIC TECHNICAL DATA SHEET FOR AUTHORIZED SUBSTRATES.
2. DEPTH OF GROWING MEDIA MAY VARY DEPENDING ON PROJECT SPECIFIC REQUIREMENTS.
3. DETAIL IS FOR REFERENCE ONLY. REFER TO DESIGN PROFESSIONAL TO VERIFY WIND UPLIFT MINIMUM REQUIREMENTS.
4. REFER TO THE VEGETATIVE ROOFING GUIDE SPECIFICATION FOR RECOMMENDED INSTALLATION PROCEDURES.

Henry[®]

999 N. Pacific Coast Hwy, Suite 800
 El Segundo, CA 90245
 800-486-1278 • www.henry.com

MANUFACTURER GUIDE DETAILS ARE FOR REFERENCE ONLY. HENRY[®] DOES NOT ASSUME RESPONSIBILITY FOR ERRORS OR DEVIATIONS IN DESIGN OR ENGINEERING. PROJECT SPECIFIC VERIFICATION IS RECOMMENDED PRIOR TO INSTALLATION.

VEGETATIVE ROOFING - HENRY 790-11/790-11EV

EXPANSION JOINT	SCALE: N.T.S.	06-01-2020
	VR-790-11-8C	

CONCEALED FLASHING
NEOFLASH OR HENRY 990-25